

TBC


• Reducer & Motor •

RV蜗轮蜗杆减速机系列



型号说明 / MODEL ILLUMINATE

NMRV/NRV 蜗轮蜗杆减速电机与减速机
WORM GEARED MOTORS AND WORM GEAR UNITS

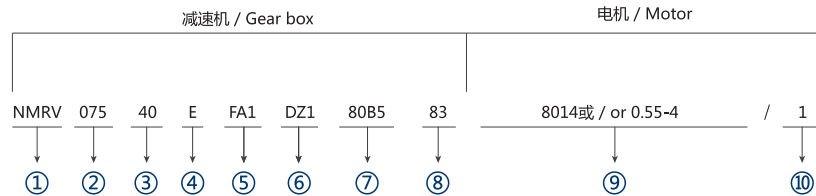

NO	说明	Comments
1	型号代码： 1. RV孔输入带输入法兰 2. NRV轴输入不带输入法兰	Model code 1. RV:Hole input with flange 2. NRV:Shaft input without flange
2	蜗轮蜗杆减速机中心距（规格）	Central distance of worm gear units(spec)
3	减速机速比 (i=5,7.5,10,15,20,25,30,40,50,60,80,100)	Speed ratio of reducer r(i=5,7.5;10;15;20;25;30;40;50;60;80;100)
4	1. 无代号表示不带蜗杆同向尾出轴 2. E：带蜗杆同向尾出轴	1. No mark means single extension worm shaft 2. E: Double extension worm shaft
5	1. 无代号表示不带输出法兰 2. FA,FB,FC,FD,FE(1/2):输出法兰号和位置	1. No mark means without output flange 2. FA,FB,FC,FD,FE(1/2):output Flange and position
6	1. 无代号表示孔输出 2. DZ (1/2)：单向输出轴和位置 3. SZ：双向输出轴	1. No mark means hole output 2. DZ(1/2):Single output shaft and position 3. SZ:Double output shaft
7	输入法兰规格型式（不带电机时）	Normalized from of input flange(without motor)
8	安装方位代号	Installation position code
9	1. 无代号表示不带电机 2. 电机型号或功率，极数	1. No mark means without motor 2. Model motors(poles of power)
10	电机接线盒位置，默认位置1可以不写	Position diagram for motor terminal box default position 1 not to write out is ok

选型相关参数 / RELEVANT PARAMETER

功率 P

$$P_1 = P_2 / \eta \text{ (kw)}$$

$$P_{1n} \geq P_1 \cdot f_s \text{ (kw)}$$

P_1 输入功率
 P_2 输出功率
 P_{1n} 输入电机额定功率

f_s 使用系数
 η 传动效率

在NMRV蜗轮蜗杆减速机选型表中，这个功率 P_{1n} 是指在输入转速为 n_1 并且对应的使用系数 $f_s=1$ 时，减速机的安全输入功率，单位kw。

传动效率 η 值是减速机经过足够长时间的磨合后计算得到的。磨合后在动转过程中，表面温度下降并最终稳定。需要特别强调的是样本中给定的额定转矩值 M_{2n} 应该考虑到传动效率 η 的关系。

Power P

$$P_1 = P_2 / \eta \text{ (kw)}$$

$$P_{1n} \geq P_1 \cdot f_s \text{ (kw)}$$

P_1 Input power
 P_2 Output power
 P_{1n} Rated input motor power

f_s Service factor
 η Transmission efficiency

The parameter can be found in the NMRV gear-box rating charts and represents the kw that can be safely transmitted to the gearbox, based on input speed n_1 and service factor $f_s=1$.

Values of η are calculated for gearboxes after a sufficiently in operation reduces and finally stabilizes. It may be worth high lighting that values of rated torque M_{2n} given in the catalogue take the transmission efficiency η into consideration.

转速 n

n_1 减速机输入转速
 n_2 减速机输出转速

若是减速机外部传动装置驱动，为了优化工作条件和提高使用寿命，建议使用1400r/min或更低转速。

ROTATION SPEED N

n_1 Gear units input speed
 n_2 Gear units output speed

If driven by the external gearing, 1400r/min or lower rotation speed is suggested so as to optimize the working conditions and prolong the service life.

传动比 i

$$i = n_1 / n_2$$

TRANSMISSION RATIO I

$$I = n_1 / n_2$$

扭矩 M

$$M_2 = 9550 \cdot P_1 \cdot \eta / n_2 \text{ (Nm)}$$

$$M_{2n} \geq M_2 \cdot f_s \text{ (Nm)}$$

M_2 输出扭矩
 M_{2n} 额定输出扭矩
 P_1 输入功率
 η 传动效率
 f_s 使用系数

TORQUE M

$$M_2 = 9550 \cdot P_1 \cdot \eta / n_2 \text{ (Nm)}$$

$$M_{2n} \geq M_2 \cdot f_s \text{ (Nm)}$$

M_2 Output torque
 M_{2n} Rated output torque
 P_1 Input power
 η Transmission efficiency
 f_s Service factor


选型相关参数 / RELEVANT PARAMETER

使用系数 f_s

减速机上的从动机构的受驱动效果是使用系数 f_s 这个系数来衡量的。该使用系数根据每天的运转时间和启动频率 Z 而定的。三种负载分类取决于惯性加速系数，在下图中可读取实际应用的使用系数，按这图表选取的使用系数必须小于或者等于性能参数表中提供的使用系数。

SERVICE FACTOR f_s

The effect of the driven machine on the gear unit is taken into account to a sufficient level of accuracy using the service factor f_s . The service factor is determined according to the daily operating time and the starting frequency Z . Three load classifications are considered depending on the mass acceleration factor. You can read off the service factor applicable to your application in following figure. The service factor selected using this diagram must be less than or equal to the service factor as given in the performance parameter table.

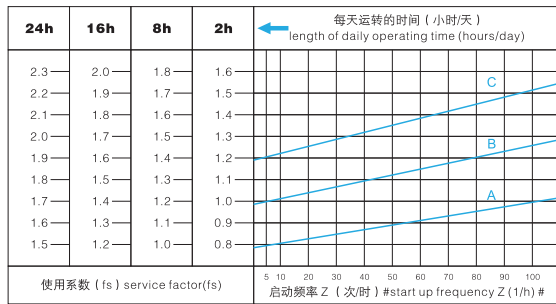

启动频率 Z ：周期包括所有启动，制动的次数以及变速电机高低速变化时的次数。

Starting frequency Z : The cycles include all starting and braking procedures as well as change overs from low to high speed.

负载类型

负载性质：

A 均匀冲击负载，允许惯性加速系数 $F_a \leq 0.3$

B 中等冲击负载，允许惯性加速系数 $F_a \leq 3$

C 重冲击负载，允许惯性加速系数 $F_a \leq 10$

LOAD CLASSIFICATIONS

Type of load:

A Uniform, permitted mass acceleration factor $F_a \leq 0.3$

B Moderate shock load, permitted mass acceleration factor $F_a \leq 3$

C Heavy shock load, permitted mass acceleration factor $F_a \leq 10$

负载类型：

轻负载的螺杆输送，风扇，装备线，输送带，小型搅拌机，电梯，清洗机器，过滤器，控制驱动。

卷扬机，木工机器进料器，货物起重机，平衡器，绞螺纹机器，中型搅拌机，重型输送带，绞盘，滑动闸门，刮料机，包装机械，混凝土搅拌机，行车驱动装置，铣床，齿轮泵。

大型搅拌机，剪床，压机，离心机，旋转支撑装置，重型绞盘和起重机，磨床，石材打磨机，翻斗机，钻床，冲床，凸轴压机，混床，机床转盘，翻桶装置，振荡装置，破碎机。

Load Classifications:

Screw feeders for light materials, fans, assembly lines, conveyor belts for light materials, small mixers, lifts, cleaning machines, medium mixers, conveyor belts for heavy materials, winches, sliding doors, fertilizer scrapers, packing machines, concrete mixers, crane mechanisms, milling cutters, folding machines, gear pumps.

Mixers for heavy materials, shears, presses centrifuges, rotating supports, winches and lifts for heavy materials, grinding lathes, stone mills, bucket elevators, drilling machines, hammer mills, campresses, folding machines, turntables, tumbling barrels, vibrators, shredders

选型相关参数 / RELEVANT PARAMETER

惯性加速系数

惯性加速系数计算如下：

$$F_a = J_c / J_m$$

F_a 惯性加速系数

J_c 所有外部传动惯量 (kgm²)

J_m 驱动电机的传动惯量 (kgm²)

如果惯性加速系数 $F_a > 10$ ，请与我们联系。

受环境温度影响，使用系数 f_s 仍须按以下调整：

1. 环境温度30~40°C； $f_s \times (1.1 \sim 1.2)$

2. 环境温度40~50°C； $f_s \times (1.3 \sim 1.4)$

3. 环境温度50~60°C； $f_s \times (1.5 \sim 1.6)$

4. 环境温度 > 60°C，请与我们联系。

为了保持减速机的使用寿命，从产品样本中所选择的使用系数 f_s 应等于或略高于计算出的使用系数 f_s 。

MASS ACCELERATION FACTOR

The mass acceleration factor is calculated as follows :

$$F_a = J_c / J_m$$

F_a Mass acceleration factor

J_c All external mass moments of inertia (kgm²)

J_m Mass moment of inertia on the motor end (kgm²)

If mass acceleration factors $F_a > 10$, please call our Technical Service.

Service factor f_s should be adjusted as follows:

1. ambient temperature is 30~40°C; $f_s \times (1.1 \sim 1.2)$

2. ambient temperature is 40~50°C; $f_s \times (1.3 \sim 1.4)$

3. ambient temperature is 50~60°C; $f_s \times (1.5 \sim 1.6)$

4. ambient temperature is > 60°C, please call our Technical Service.

To keep the service-life of gear units, the use factor f_s selected from the catalogue must be equal or slightly higher than the calculated use factor f_s

径向载荷 F_r

在决定影响径向载荷时，安装在轴端上的传动件类型必须考虑在内，不同类型的传动对应不同的传动附加系数 f_z ，列表如下：

RADIAL LOADS F_r

When determining the resulting radial loads, the type of transmission elements, mounted on the shaft end must be considered. Various transmission elements are corresponding with following transmission element factors f_z .

传动件 Transmission element	传动附加系数 f_z Transmission element factor f_z	注释 Comments
齿轮 Gears	1.00	≥ 17 齿 teeth
	1.15	< 17齿 teeth
链轮 Chain sprockets	1.00	≥ 20 齿 teeth
	1.25	< 20齿 teeth
	1.40	< 13齿 teeth
V带轮 Narrow V-belt pulleys	1.75	有预紧力作用 Influence of the tensile force
平带轮 Flat belt pulleys	2.50	有预紧力作用 Influence of the tensile force
齿带轮 Toothed belt pulleys	2.50	有预紧力作用 Influence of the tensile force

作用在轴上的径向载荷按如下公式计算：

$$F_r = \frac{M \cdot 2000 \cdot f_z}{d_o} \quad (\text{N})$$

F_r 作用在轴上的载荷 (N)

M 作用在轴上的扭矩 (Nm)

d_o 安装在轴上传动件的平均直径 (mm)

f_z 传动附加系数

The overhung loads exerted on the motor or gear shaft is then calculated as follows.

$$F_r = \frac{M \cdot 2000 \cdot f_z}{d_o} \quad (\text{N})$$

F_r Resulting radial load (N)

M Torque on the shaft (Nm)

d_o Mean diameter of the mounted transmission element in (mm)

f_z Transmission element factor

选型相关参数 / RELEVANT PARAMETER

当径向负荷不作用在轴中点时,按以下公式计算有效负荷:

$$F \times L \leq \frac{Fr_2 \cdot a}{(b+x)} \quad (\text{N})$$

Fr_2 依据下面表格给出中底脚安装式齿轮减速器的许可径向载荷 ($X=L/2$) (N)

a,b 齿轮减速器径向换算常量(mm)

X 轴到实际作用点的距离(mm)

a,b, Fr_2 的数值在下面表格给出:

The allowed radial load force on the shaft is calculated with the following formula:

$$F \times L \leq \frac{Fr_2 \cdot a}{(b+x)} \quad (\text{N})$$


Fr_2 Permitted overhung load($x=L/2$) for foot-mounted gear units according to the selection tables in (N)

A, b Gear unit constant for overhung load conversion(mm)

X Distance from the shaft shouldert to the force application point in(mm)


The values of a, b Fr_2 are given in the following tables:

输出轴径向载荷 / Out put shafts radial loads



NMRV	025	030	040	050	063	075	090	110	130	150
a	50	65	84	101	120	131	162	176	188	215
b	38	50	64	76	95	101	122	136	148	174
Fr_2 max	1350	1830	3490	4840	6270	7380	8180	12000	13500	18000

输入轴径向载荷 / Input shafts radial loads



NMRV	030	040	050	063	075	090	110	130	150
a	86	106	129	159	192	227	266	314	350
b	76	94.5	114	139	167	202	236	274	310
Fr_2 max	210	350	490	700	980	1270	1700	2100	2800

选型相关参数 / RELEVANT PARAMETER

选型表注释 / SELECTION TABLES COMMENTS

P_{in} (kw)	n_2 (r/min)	i	M_{2n} (Nm)	M_{2s} (Nm)	f_s		
P_{in}	n_2	M_{2n}	M_{2s}	f_s			
输入电机额定功率 (kw);	输出转速 (r/min);	额定输出扭矩(Nm);	最大允许输出扭矩 (Nm);	减速机电速比;	使用系数;	减速机型号;	电机型号;
Rated power driving motor (kw)	Output speed (r/min)	Rated output torque(Nm)	Permissible output torque(Nm)	Gear unit ratio	Service factor	Gear unit type	Motor type

选型举例 / SELECTION EXAMPLE

减速电机

例: 被驱动设备所需功率0.5KW, $n_1=1400$ r/min, 均匀冲击负载, 启动频率20次/小时, 24小时连续运行, 环境温度32℃, 输出转速 $n_2=93.3$ r/min, 减速电机要求B3安装方位, 则:

$$i = \frac{n_1}{n_2} = \frac{1400}{93.3} = 15$$

查P19页啮合参数表, 估算当 $i=15$ 时, $\eta_d=0.82$

查图调整使用系数得 $f_s=1.53 \times 1.12=1.714$

$P_{in} \geq P_2 / \eta_d \cdot f_s = 0.5 / 0.82 \times 1.714 = 1.045$ (kw)

查NMRV系列性能参数表可确定减速电机型号为:

NMRV075-15-B3-1.1-4

输出扭矩 M_2 计算:

$$M_2 = \frac{9550 \cdot P_2}{n_2} = \frac{9550 \times 0.5}{93.3} = 51.18(\text{Nm})$$

$$M_{2s} = 95 \geq M_2 \cdot f_s = 51.18 \times 1.714 = 87.72(\text{Nm})$$

GEAR MOTOR

Example:The input power of driver machine is 0.5kw, $n_1=1400$ r/min, uniform, start up frequency 20(1/h),continuous running for 24 hours, the ambient temperature is 32℃, $n_2=93.3$ r/min,B3 mounted so:

$$i = \frac{n_1}{n_2} = \frac{1400}{93.3} = 15$$

Check mesh table on P19, estimate when the $i=15$, $\eta_d=0.82$

Check and adjust the service factor, will get $f_s=1.53 \times 1.12=1.714$

$P_{in} \geq P_2 / \eta_d \cdot f_s = 0.5 / 0.82 \times 1.714 = 1.045$ (kw)

Choose type:

NMRV075-15-B3-1.1-4

$$M_2 = \frac{9550 \cdot P_2}{n_2} = \frac{9550 \times 0.5}{93.3} = 51.18(\text{Nm})$$

$$M_{2s} = 95 \geq M_2 \cdot f_s = 51.18 \times 1.714 = 87.72(\text{Nm})$$

减速机

例: 被驱动设备所需扭矩为300Nm, 工作8小时连续运行, 均匀冲击负载, 启动频率5次/小时, 环境温度30℃, 即可选用系数 $f_s=1.2 \times 1.1=1.32$, 减速机输入转速 $n_1=900$ r/min, 输出转速 $n_2=22.5$ r/min.

$$M_{2n} \geq M_2 \cdot f_s = 300 \times 1.32 = 396(\text{Nm})$$

$$i = \frac{n_1}{n_2} = \frac{900}{22.5} = 40$$

查NMRV系列性能参数表可确定减速电机型号为:

NMRV090-40

GEAR UNITS

Example:Required torque 300um on driven machine, continuous running for 8 hours,uniform loda,the ambient temperature is 30 °C, then choose the service factor $f_s=1.2 \times 1.1=1.32$, $n_1=900$ r/min, $n_2=22.5$ r/min.

$$M_{2n} \geq M_2 \cdot f_s = 300 \times 1.32 = 396(\text{Nm})$$

$$i = \frac{n_1}{n_2} = \frac{900}{22.5} = 40$$

Choose type:

NMRV090-40

选型相关参数 / RELEVANT PARAMETER

效率与自锁特性 / EFFICIENCY & IRREVERSIBILITY CHARACTER

效率是减速机一个重要参数，效率 η 的值取决于下列参数：1.蜗轮蜗杆的螺旋角；2.输入转速；3.蜗轮蜗杆的磨合时间；4.油品、油封和轴承的性能。在第21页上的啮合参数表列出了动态效率（ $\eta_1=1400$ ）及静态效率参数。请注意：这些参数是指减速机磨合后性能稳定的计算值。另外，样本中规定的扭矩 M_m 也是减速机磨合性能稳定的计算值。上述的实际值可能会有上下偏差。

Efficiency is an important parameter of reducer. Efficiency η depends on the following parameters: 1. helix angle of gearing; 2. driving speed; 3. running-in of gearing; 4. The performance of oil, oil seal and bearing. The mesh data table on page 21 shows dynamic efficiency ($\eta_1=1400$) and static efficiency values. Remember that these values are only achieved after the unit has been run in. Torque values M_m indicated in the catalogue are calculated by considering the steady-state performance of the gearboxes. The actual values mentioned above may have deflection.

动态自锁

动态自锁是指当马达输入轴突然停止时，输出轴能同步停止。此条件要求动态效率 $\eta_d < 0.5$ （参见第21页表格）

DYNAMIC IRREVERSIBILITY

Dynamic irreversibility is achieved when the output shaft stops instantly when drive is no longer transmitted through the worm shaft. This condition requires a dynamic efficiency of $\eta_d < 0.5$ (see table on page 21).

静态自锁

静态自锁是指当减速机处于静止状态时，输出轴上的负载不能把蜗轮推动。此条件要求静态效率 $\eta_s < 0.5$ （参见第21页表格）

STATIC IRREVERSIBILITY

Static irreversibility is achieved when the gear reducer is at a standstill, the application of a load to the output shaft can't drive the worm shaft. This condition requires a static efficiency of $\eta_s < 0.5$ (see table on page 21).


η_d	> 0.6	0.5~0.6	0.4~0.5	< 0.4
动态自锁效果	动态不自锁	动态自锁很低	动态自锁良好	动态自锁
Dynamic irreversibility	Dynamic reversibility	Low dynamic reversibility	Good dynamic irreversibility	Dynamic irreversibility

η_s	> 0.55	0.5~0.55	< 0.5
静态自锁效果	静态不自锁	静态自锁很低	静态自锁
Static irreversibility	Static reversibility	Low static reversibility	Static irreversibility

上述表格中所有参数只是供大概参考，振动和冲击也会影响减速机的自锁功能。事实上要保证完全自锁是不可能的，我们建议需要时安装外部的安全制动的装置。对于一个组合减速机自锁条件时，必须考虑单减速机的自锁功能效率，因为整体自锁功能是： $\eta_{tot} = \eta_1 \times \eta_2$ 。

The table shows approximate irreversibility classes. Vibrations and shocks can affect a gear reducer's irreversibility. As it is virtually impossible to provide and guarantee total non-reversing, we recommend the use of an external brake with sufficient capability to prevent vibrations induced starting, where these circumstances are required. For the irreversibility conditions of a combined geared unit one must consider that the efficiency of the group is given by the product of the efficiencies of each single reducer: $\eta_{tot} = \eta_1 \times \eta_2$.

NMRV结构分解图 / NMRV STRUCTURE DIAGRAM

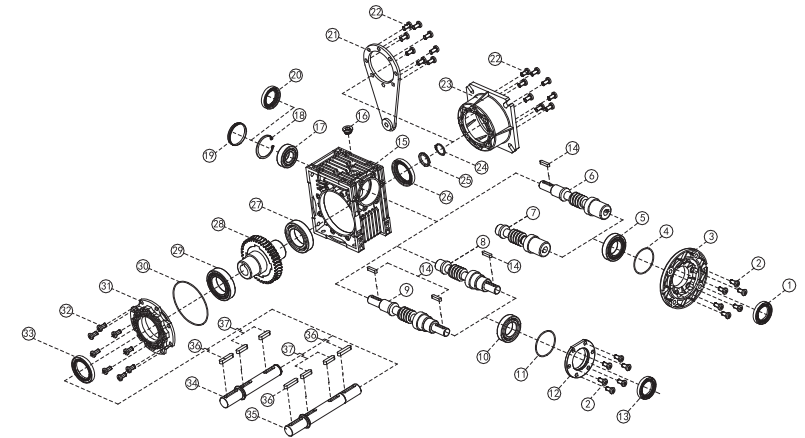


1 油封	11 O型橡胶密封圈	21 扭力臂	31 输出端盖
2 内六角圆柱头螺栓	12 轴承座	22 内六角圆柱头螺栓	32 内六角圆柱头螺栓
3 电机法兰	13 油封	23 输出法兰	33 油封
4 O型橡胶密封圈	14 平键	24 轴用弹性挡圈	34 单向输出轴
5 轴承	15 箱体	25 挡圈	35 双向输出轴
6 孔输入轴输入蜗杆	16 油塞	26 油封	36 平键
7 孔输入蜗杆	17 轴承	27 轴承	37 平键
8 轴输入蜗杆	18 孔用弹性挡圈	28 蜗轮	
9 双轴输入蜗杆	19 平面油封	29 轴承	
10 轴承	20 油封	30 O型橡胶密封圈	
1 Oil seal	11 O-ring	21 Torque arm	31 Bearing support cover
2 Hexagon socket head cap screw	12 Bearing block	22 Hexagon socket head cap screw	32 Hexagon socket head cap screw
3 Flange PAM	13 Oil seal	23 Output flange	33 Oil seal
4 O-ring	14 Parallel key	24 Circlip for shaft	34 Single output shaft
5 Bearing	15 Cablint	25 Washer	35 Double output shaft
6 Double ext. RV Worm	16 Plug cock	26 Oil seal	36 Parallel key
7 PAM worm	17 Bearing	27 Bearing	37 Parallel key
8 RV worm	18 Circlip for hole	28 Worm wheel	
9 Double ext. RV worm	19 Oil seal	29 Bearing	
10 Bearing	20 Oil seal	30 O-ring	

减速机啮合参数 / MESH DATA

NRV	i	5	7.5	10	15	20	25	30	40	50	60	80	100
025	Z1	6	4	3	2	2	—	1	1	1	1	—	—
	γ	30° 58'	21° 48'	16° 42'	11° 19'	10° 53'	—	5° 43'	5° 29'	4° 34'	3° 23'	—	—
	m	1.25	1.25	1.25	1.25	1	—	1.25	1	0.8	0.65	—	—
	η _d (1400)	0.87	0.85	0.83	0.79	0.75	—	0.67	0.62	0.58	0.55	—	—
	η _s	0.72	0.71	0.68	0.61	0.56	—	0.46	0.41	0.36	0.34	—	—
030	Z1	6	4	3	2	2	1	1	1	1	1	1	—
	γ	29° 03'	20° 19'	15° 31'	10° 29'	5° 42'	6° 10'	5° 17'	2° 52'	3° 26'	2° 52'	1° 58'	—
	m	1.5	1.5	1.5	1.5	1	1.75	1.5	1	0.9	0.75	0.55	—
	η _d (1400)	0.87	0.85	0.82	0.77	0.73	0.68	0.65	0.59	0.55	0.51	0.44	—
	η _s	0.72	0.67	0.63	0.55	0.5	0.43	0.39	0.35	0.31	0.27	0.23	—
040	Z1	6	4	3	2	2	2	1	1	1	1	1	1
	γ	30° 58'	21° 48'	16° 42'	11° 19'	11° 19'	8° 08'	5° 43'	5° 43'	4° 05'	2° 52'	2° 52'	2° 29'
	m	2	2	2	2	1.6	1.25	2	1.6	1.25	1	0.8	0.65
	η _d (1400)	0.89	0.87	0.85	0.82	0.78	0.75	0.7	0.65	0.62	0.58	0.52	0.47
	η _s	0.74	0.71	0.67	0.6	0.55	0.51	0.45	0.4	0.36	0.32	0.28	0.24
050	Z1	4	4	3	2	2	2	1	1	1	1	1	1
	γ	23° 49'	21° 48'	16° 42'	11° 19'	11° 19'	9° 05'	5° 43'	5° 43'	4° 21'	2° 52'	2° 52'	2° 17'
	m	3.4	2.5	2.5	2.5	2	1.6	2.5	2	1.6	1.25	1	0.8
	η _d (1400)	0.89	0.88	0.86	0.82	0.79	0.76	0.72	0.67	0.63	0.59	0.53	0.49
	η _s	0.74	0.7	0.66	0.59	0.55	0.51	0.44	0.39	0.35	0.32	0.27	0.23
063	Z1	—	4	3	2	2	2	1	1	1	1	1	1
	γ	—	24° 31'	18° 53'	12° 51'	11° 19'	8° 45'	6° 30'	5° 43'	4° 24'	3° 03'	2° 52'	2° 12'
	m	—	3.25	3.25	3.25	2.5	2	3.25	2.5	2	1.6	1.25	1
	η _d (1400)	—	0.88	0.87	0.83	0.81	0.78	0.74	0.7	0.66	0.62	0.57	0.51
	η _s	—	0.71	0.67	0.6	0.55	0.51	0.45	0.4	0.36	0.33	0.28	0.24
075	Z1	—	4	3	2	2	2	1	1	1	1	1	1
	γ	—	28° 4'	21° 48'	14° 56'	11° 19'	11° 19'	7° 36'	5° 43'	5° 43'	3° 49'	4° 21'	2° 52'
	m	—	4	4	4	3	2.5	4	3	2.5	2	1.6	1.25
	η _d (1400)	—	0.89	0.88	0.85	0.82	0.80	0.76	0.72	0.69	0.65	0.60	0.55
	η _s	—	0.71	0.68	0.61	0.57	0.53	0.46	0.42	0.38	0.35	0.29	0.26
090	Z1	—	4	3	2	2	2	1	1	1	1	1	1
	γ	—	28° 04'	26° 34'	18° 26'	14° 02'	11° 19'	9° 28'	7° 08'	5° 43'	4° 46'	3° 53'	2° 52'
	m	—	4.8	5	5	3.75	3	5	3.75	3	2.5	1.9	1.5
	η _d (1400)	—	0.9	0.89	0.86	0.84	0.82	0.78	0.75	0.72	0.69	0.63	0.59
	η _s	—	0.73	0.7	0.64	0.6	0.56	0.49	0.45	0.41	0.38	0.32	0.28
110	Z1	—	4	3	2	2	2	1	1	1	1	1	1
	γ	—	28° 46'	22° 22'	15° 21'	14° 20'	14° 02'	7° 49'	7° 17'	7° 08'	5° 48'	4° 54'	3° 37'
	m	—	5.9	5.9	5.9	4.6	3.75	5.9	4.6	3.75	3.15	2.4	1.9
	η _d (1400)	—	0.9	0.89	0.86	0.85	0.84	0.79	0.78	0.75	0.72	0.67	0.63
	η _s	—	0.72	0.69	0.63	0.62	0.59	0.48	0.48	0.44	0.41	0.36	0.32
130	Z1	—	4	3	2	2	2	1	1	1	1	1	1
	γ	—	29° 15'	22° 47'	15° 39'	13° 47'	12° 24'	7° 58'	7° 00'	6° 17'	6° 07'	3° 56'	3° 41'
	m	—	7	7	7	5.4	4.4	7	5.4	4.4	3.75	2.75	2.25
	η _d (1400)	—	0.91	0.89	0.87	0.86	0.84	0.8	0.78	0.75	0.72	0.68	0.64
	η _s	—	0.72	0.69	0.63	0.61	0.58	0.49	0.46	0.43	0.39	0.34	0.3
150	Z1	—	6	4	3	2	2	2	1	1	1	1	1
	γ	—	29° 37'	24° 41'	15° 52'	12° 56'	11° 19'	9° 56'	6° 34'	5° 43'	5° 00'	3° 45'	2° 52'
	m	—	5.4	6.16	5.4	6.16	5	4.2	6.16	5	4.2	3.15	2.5
	η _d (1400)	—	0.91	0.9	0.88	0.86	0.84	0.83	0.78	0.76	0.73	0.68	0.64
	η _s	—	0.73	0.71	0.66	0.6	0.57	0.54	0.45	0.42	0.39	0.33	0.29

备注: i-速比, Z1-蜗杆头数; γ-导程角, m-模数, η_d动态效率, η_s静态效率。

减速机输入尺寸 / NMRV REDUCER INPUT SIZE

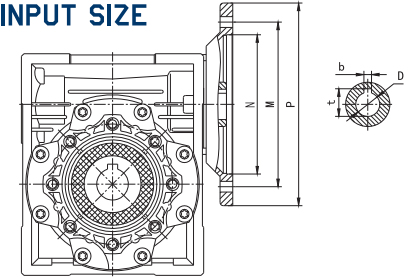


NMRV	IEC接口			键槽		传动比 (i)													
	PAM-IEC	N	M	P	b	t	5	7.5	10	15	20	25	30	40	50	60	80	100	
025	56B14	50	65	80	3	10.4	9	9	9	9	9	9	9	9	9	9	9	9	9
		80	100	120	3	10.4	9	9	9	9	9	9	9	9	9	9	9	9	9
030	63B14	60	75	90	4	12.8	11	11	11	11	11	11	11	11	11	11	11	11	11
		95	115	140	4	12.8	11	11	11	11	11	11	11	11	11	11	11	11	11
040	63B14	60	75	90	3	10.4	/	/	/	/	/	/	/	/	/	9	9	9	9
		95	115	140	4	12.8	11	11	11	11	11	11	11	11	11	11	11	11	11
050	71B14	70	85	105	5	16.3	14	14	14	14	14	14	14	14	14	14	14	14	14
		110	130	160	5	16.3	14	14	14	14	14	14	14	14	14	14	14	14	14
063	80B14	80	100	120	4	12.8	/	/	/	/	/	/	/	/	11	11	11	11	11
		130	165	200	6	21.8	/	19	19	19	19	19	19	19	19	19	19	19	19
075	90B14	95	115	140	8	27.3	/	24	24	24	24	24	24	24	24	24	24	24	24
		130	165	200	8	27.3	/	24	24	24	24	24	24	24	24	24	24	24	24
090	100/112B14	110	130	160	8	31.3	/	28	28	28	28	28	28	28	28	28	28	28	28
		180	215	250	8	31.3	/	28	28	28	28	28	28	28	28	28	28	28	28
110	80B5	80	100	120	6	21.8	/	/	/	/	/	/	/	/	19	19	19	19	19
		130	165	200	8	27.3	/	/	/	/	/	/	/	/	24	24	24	24	24
130	90B5	95	115	140	8	27.3	/	/	/	/	/	/	/	/	24	24	24	24	24
		130	165	200	8	27.3	/	/	/	/	/	/	/	/	28	28	28	28	28
150	100/112B5	110	130	160	8	31.3	/	/	/	/	/	/	/	/	28	28	28	28	28
		180	215	250	8	31.3	/	/	/	/	/	/	/	/	38	38	38	38	38

RV产品介绍 / RV PRODUCT INTRODUCTION




RV尺寸 / RV SIZE

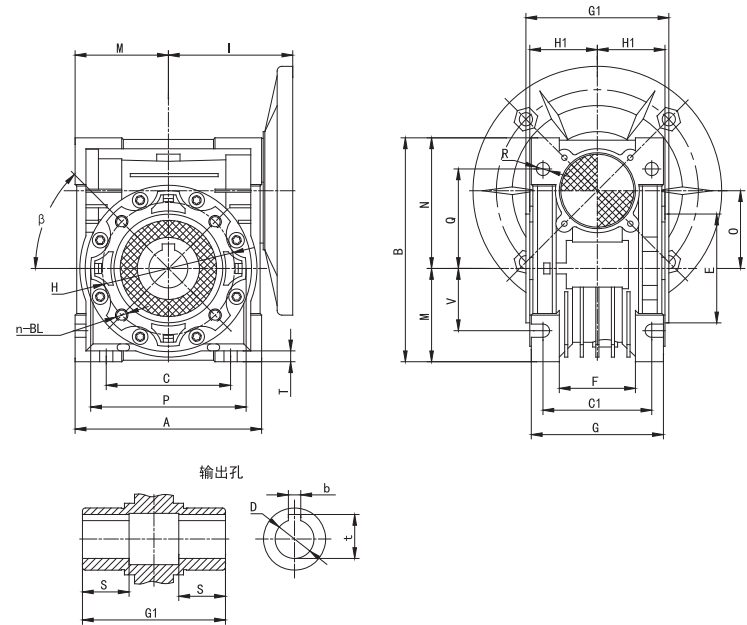


RV	A	B	C	C1	D (H8)	E (h8)	F	G	G1	H	H1	I	M	N	O	P	Q	R	S	T	BL	β	b	t	V
030	80	97	54	44	14	55	32	56	63	65	29	55	40	57	30	75	44	6.5	21	5.5	M6X10 (n=4)	0°	5	16.3	27
040	100	121.5	70	60	18 (19)	60	43	71	78	75	36.5	70	50	71.5	40	87	55	6.5	26	6.5	M6X10 (n=4)	45°	6	20.8 (21.8)	35
050	120	144	80	70	25 (24)	70	49	85	92	85	43.5	80	60	84	50	100	64	8.5	30	7	M8X12 (n=4)	45°	8	28.3 (27.3)	40
063	144	174	100	85	25 (28)	80	67	103	112	95	53	95	72	102	63	110	80	8.5	36	8	M8X12 (n=8)	45°	8	28.3 (31.3)	50
075	172	205	120	90	28 (35)	95	72	112	120	115	57	112.5	86	119	75	140	93	11	40	10	M8X14 (n=8)	45°	8 (10)	31.3 (38.3)	60
090	206	238	140	100	35 (38)	110	74	130	140	130	67	129.5	103	135	90	160	102	13	45	11	M10X16 (n=8)	45°	10	38.3 (41.3)	70
110	255	295	170	115	42	130	-	144	155	165	74	160	127.5	167.5	110	200	125	14	50	14	M10X18 (n=8)	45°	12	45.3	85
130	293	335	200	120	45	180	-	155	170	215	81	179	146.5	187.5	130	250	140	16	60	15	M12X20 (n=8)	45°	14	48.8	100
150	340	400	240	145	50	180	-	185	200	215	96	210	170	230	150	250	180	18	72.5	18	M12X22 (n=8)	45°	14	53.8	120

RV-E产品介绍 / RV-E PRODUCT INTRODUCTION

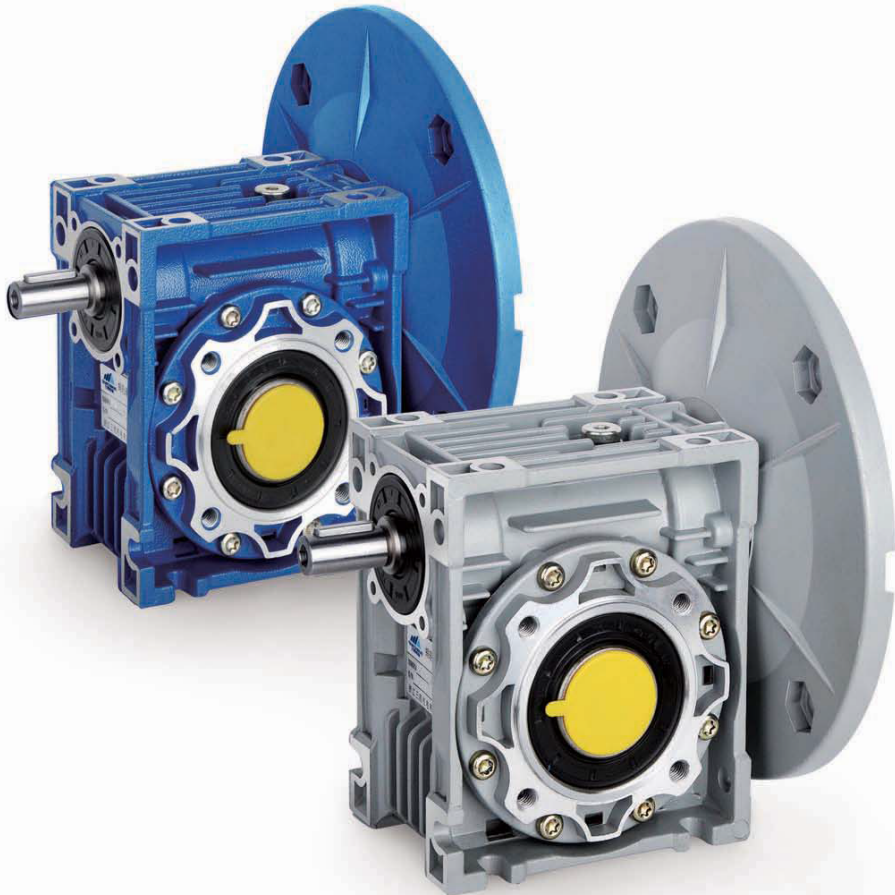

RV-E尺寸 / RV-E SIZE

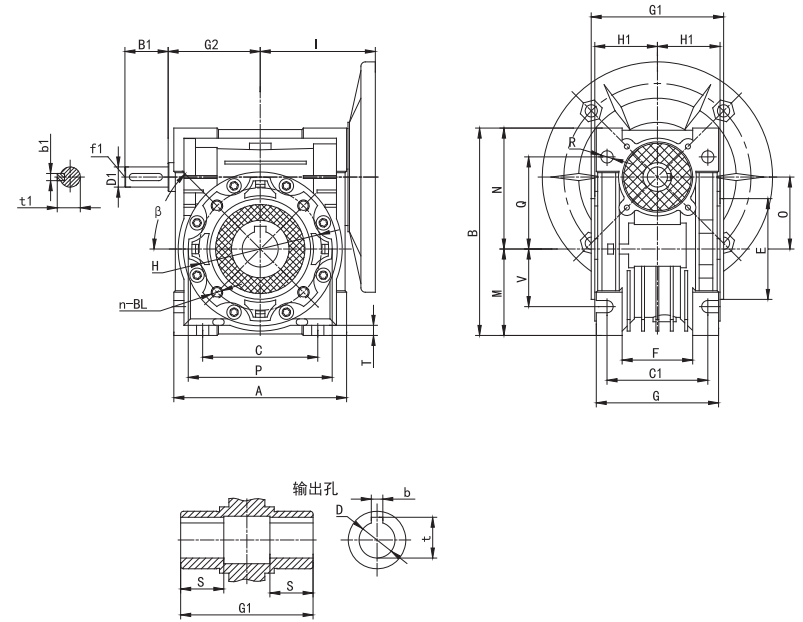


RV-E	A	B	B1	C	C1	D(H8)	D1 (j6)	E(H8)	F	G	G1	G2	H	H1	I	M	N	O	P	Q	R	S	T	BL	β	b	b1	t	t1	f1	V
030	80	97	20	54	44	14	9	55	32	56	63	45	65	29	55	40	57	30	75	44	6.5	21	5.5	M6X10 (n=4)	0°	5	3	16.3	10.2	-	27
040	100	121.5	23	70	60	18(19)	11	60	43	71	78	53	75	36.5	70	50	71.5	40	87	55	6.5	26	6.5	M6X10 (n=4)	45°	6	4	20.8(21.8)	12.5	-	35
050	120	144	30	80	70	25(24)	14	70	49	85	92	64	85	43.5	80	60	84	50	100	64	8.5	30	7	M8X12 (n=4)	45°	8	5	28.3(27.3)	16	M6	40
063	144	174	40	100	85	25(28)	19	80	67	103	112	75	95	53	95	72	102	63	110	80	8.5	36	8	M8X12 (n=8)	45°	8	6	28.3(31.3)	21.5	M6	50
075	172	205	50	120	90	28(35)	24	95	72	112	120	90	115	57	112.5	86	119	75	140	93	11	40	10	M8X14 (n=8)	45°	8(10)	8	31.3(38.3)	27	M8	60
090	206	238	50	140	100	35(38)	24	110	74	130	140	108	130	67	129.5	103	135	90	160	102	13	45	11	M10X16 (n=8)	45°	10	8	38.3(41.3)	27	M8	70
110	255	295	60	170	115	42	28	130	-	144	155	135	165	74	160	127.5	167.5	110	200	125	14	50	14	M10X18 (n=8)	45°	12	8	45.3	31	M10	85
130	293	335	80	200	120	45	30	180	-	155	170	155	215	81	179	146.5	187.5	130	250	140	16	60	15	M12X20 (n=8)	45°	14	8	48.8	33	M10	100
150	340	400	80	240	145	50	35	180	-	185	200	175	215	96	210	170	230	150	250	180	18	72.5	18	M12X22 (n=8)	45°	14	10	53.8	38	M12	120

NRV产品介绍 / NRV PRODUCT INTRODUCTION




NRV尺寸 / NRV SIZE

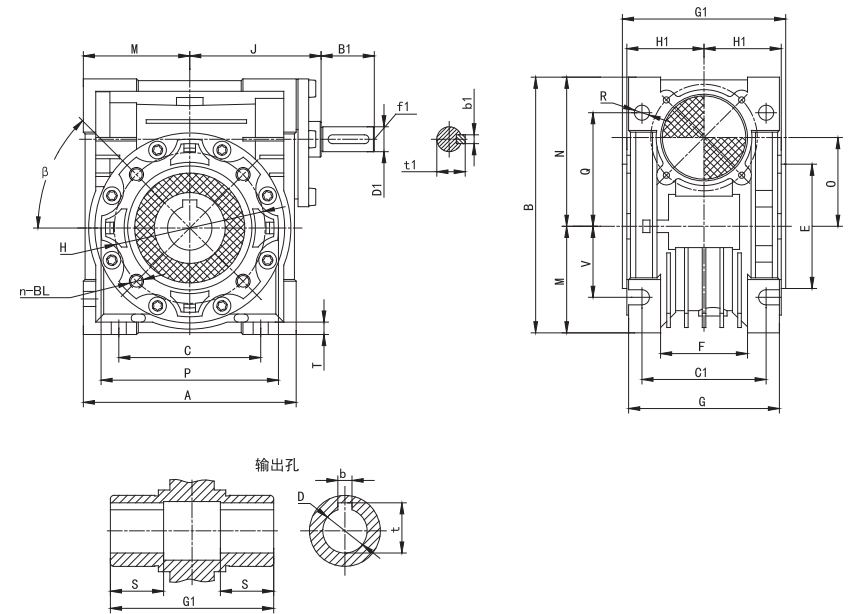


NRV	A	B	B1	C	C1	D (H8)	D1 (H8)	E (h8)	F	G	G1	H	H1	J	M	N	O	P	Q	R	S	T	BL	β	b	b1	t	t1	f1	V
030	80	97	20	54	44	14	9	55	32	56	63	65	29	51	40	57	30	75	44	6.5	21	5.5	M6X10 (n=4)	0°	5	3	16.3	10.2	-	27
040	100	121.5	23	70	60	18 (19)	11	60	43	71	78	75	36.5	60	50	71.5	40	87	55	6.5	26	6.5	M6X10 (n=4)	45°	6	4	20.8 (21.8)	12.5	-	35
050	120	144	30	80	70	25 (24)	14	70	49	85	92	85	43.5	74	60	84	50	100	64	8.5	30	7	M8X12 (n=4)	45°	8	5	28.3 (27.3)	16	M6	40
063	144	174	40	100	85	25 (28)	19	80	67	103	112	95	53	90	72	102	63	110	80	8.5	36	8	M8X12 (n=8)	45°	8	6	28.3 (31.3)	21.5	M6	50
075	172	205	50	120	90	28 (35)	24	95	72	112	120	115	57	105	86	119	75	140	93	11	40	10	M8X14 (n=8)	45°	8	8	31.3 (38.3)	27	M8	60
090	206	238	50	140	100	35 (38)	24	110	74	130	140	130	67	125	103	135	90	160	102	13	45	11	M10X16 (n=8)	45°	10	8	38.3 (41.3)	27	M8	70
110	255	295	60	170	115	42	28	130	-	144	155	165	74	142	127.5	167.5	110	200	125	14	50	14	M10X18 (n=8)	45°	12	8	45.3	31	M10	85
130	293	335	80	200	120	45	30	180	-	155	170	215	81	162	146.5	187.5	130	250	140	16	60	15	M12X20 (n=8)	45°	14	8	48.8	33	M10	100
150	340	400	80	240	145	50	35	180	-	185	200	215	96	195	170	230	150	250	180	18	72.5	18	M12X22 (n=8)	45°	14	10	53.8	38	M12	120

NRV-E产品介绍 / NRV-E PRODUCT INTRODUCTION

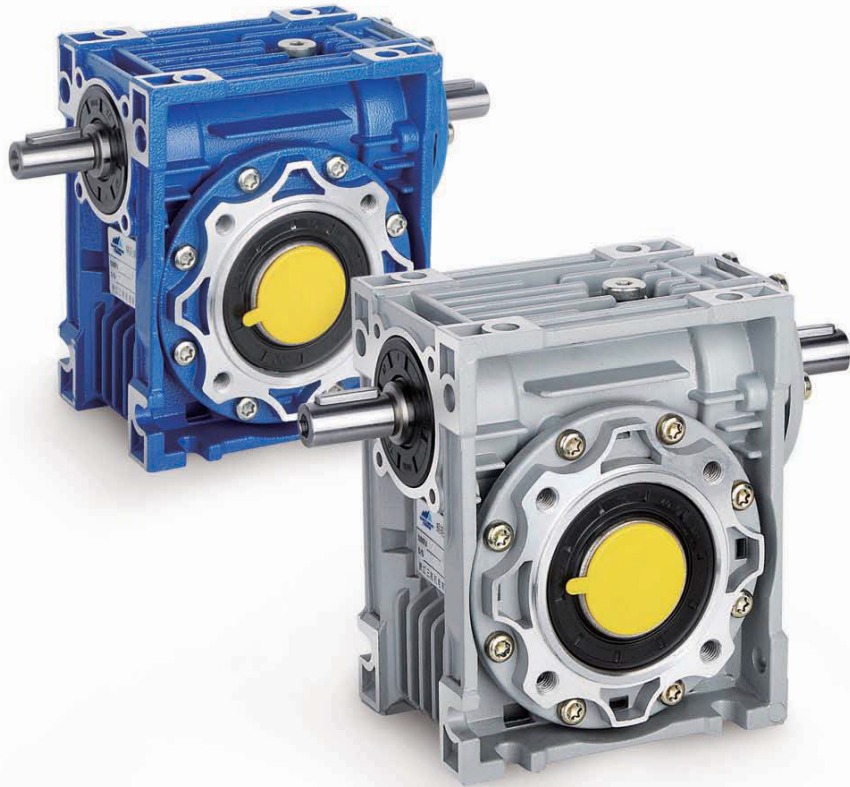


NRV-E尺寸 / NRV-E SIZE

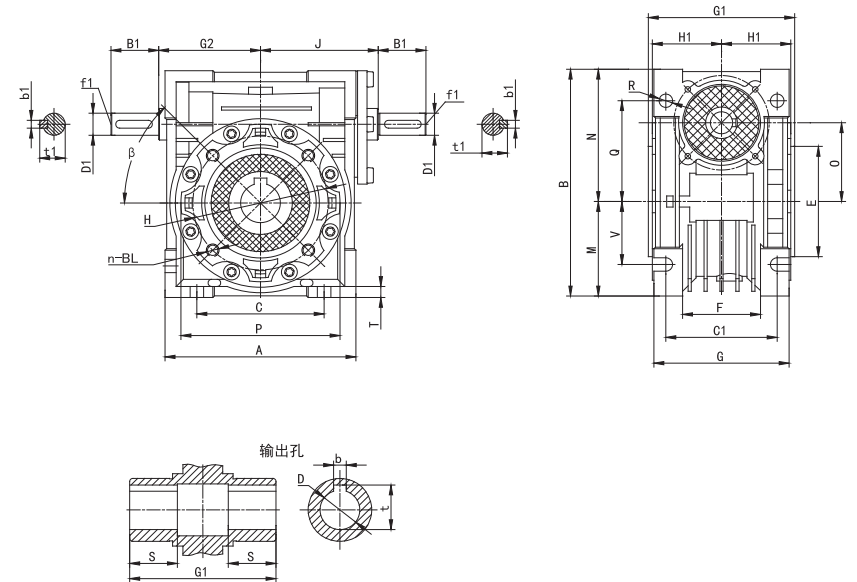

NRV-E	A	B	B1	C	C1	D (H8)	D1 (H8)	E (H8)	F	G	G1	G2	H	H1	J	M	N	O	P	Q	R	S	T	BL	β	b	b1	t	t1	f1	V
030	80	97	20	54	44	14	9	55	32	56	63	45	65	29	51	40	57	30	75	44	6.5	21	5.5	M6X10 (n=4)	0°	5	3	16.3	10.2	-	27
040	100	121.5	23	70	60	18 (19)	11	60	43	71	78	53	75	36.5	60	50	71.5	40	87	55	6.5	26	6.5	M6X10 (n=4)	45°	6	4	20.8 (21.8)	12.5	-	35
050	120	144	30	80	70	25 (24)	14	70	49	85	92	64	85	43.5	74	60	84	50	100	64	8.5	30	7	M8X12 (n=4)	45°	8	5	28.3 (27.3)	16	M6	40
063	144	174	40	100	85	25 (28)	19	80	67	103	112	75	95	53	90	72	102	63	110	80	8.5	36	8	M8X12 (n=8)	45°	8	6	28.3 (31.3)	21.5	M6	50
075	172	205	50	120	90	28 (35)	24	95	72	112	120	90	115	57	105	86	119	75	140	93	11	40	10	M8X14 (n=8)	45°	8 (10)	8	31.3 (38.3)	27	M8	60
090	206	238	50	140	100	35 (38)	24	110	74	130	140	108	130	67	125	103	135	90	160	102	13	45	11	M10X16 (n=8)	45°	10	8	38.3 (41.3)	27	M8	70
110	255	295	60	170	115	42	28	130	-	144	155	135	165	74	142	127.5	167.5	110	200	125	14	50	14	M10X18 (n=8)	45°	12	8	45.3	31	M10	85
130	293	335	80	200	120	45	30	180	-	155	170	155	215	81	162	146.5	187.5	130	250	140	16	60	15	M12X20 (n=8)	45°	14	8	48.8	33	M10	100
150	340	400	80	240	145	50	35	180	-	185	200	175	215	96	195	170	230	150	250	180	18	72.5	18	M12X22 (n=8)	45°	14	10	53.8	38	M12	120

NMRV025 小机型 / NMRV025 SMALL MODEL

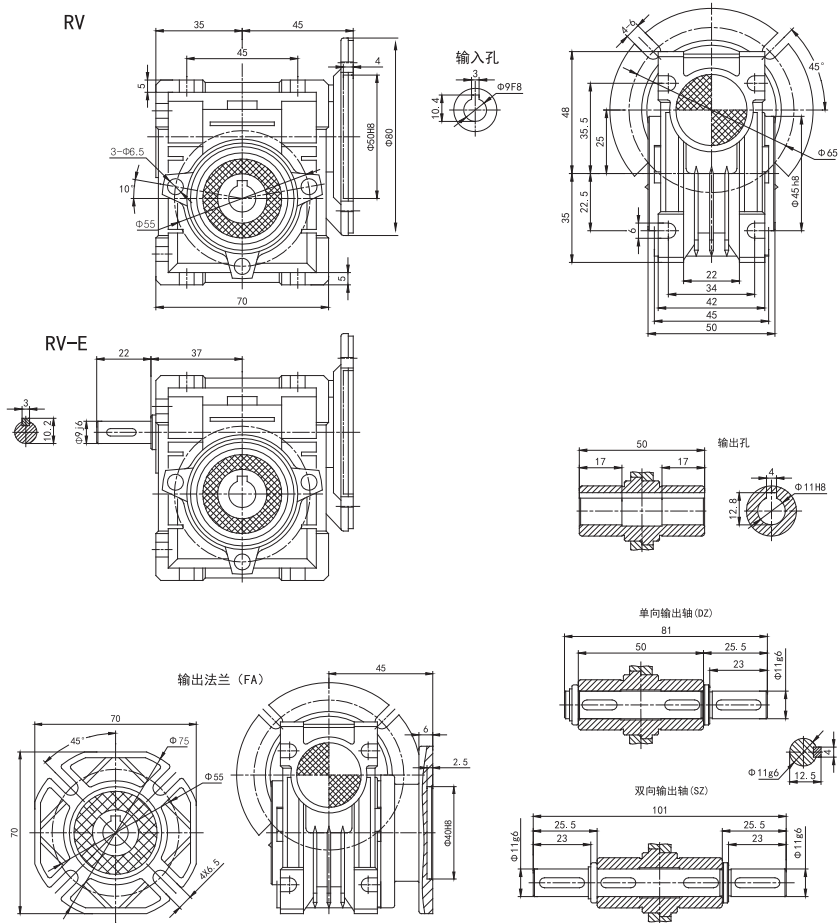



减速机选型表 / GEAR UNIT SELECTION TABLES



NMRV...IEC...性能参数 / PERFORMANCE PARAMETER

P_{in} (kw)	n_2 (r/min)	i	M_{in} (Nm)	F_{in} (N)	f_s						
0.06	280	5	1.8	439	6.2	NMRV025	56B14	5614			
	186.7	7.5	2.6	503	4.2						
	140	10	3.4	553	3.5						
	93.3	15	4.9	633	2.5						
	70	20	6.2	697	1.9						
	46.7	30	8.3	798	1.6						
	35	40	10	878	1.2						
	28	50	12	946	0.9						
	23.3	60	14	1006	0.7						
	186.7	7.5	2.6	683	7.0						
	140	10	3.4	752	5.4						
	93.3	15	4.7	861	3.9						
0.09	70	20	6	948	3.1	NMRV030	56B5/B14	5614			
	56	25	7	1021	3.1						
	46.7	30	8	1085	2.5						
	35	40	9.7	1194	1.9						
	28	50	11	1286	1.5						
	23.3	60	13	1367	1.3						
	17.5	80	14	1504	0.9						
	373.3	7.5	2.0	399	3.9				NMRV025	56B14	5612
	280	10	2.6	439	3.4						
	186.7	15	3.8	503	2.4						
	140	20	4.9	553	1.8						
	93.3	30	6.7	633	1.3						
70	40	8.5	697	1.1							
56	50	10	751	0.9							
186.7	7.5	3.9	503	2.8							
140	10	5.1	553	2.4							
93.3	15	7.3	633	1.6							
70	20	9.3	697	1.3							
46.7	30	13	798	1.0							
0.09	35	40	16	878	0.8	NMRV025	56B14	5624			
	373.3	7.5	2.0	542	6.5						
	280	10	2.6	597	5.0						
	186.7	15	3.7	683	3.5						
	140	20	4.7	752	2.5						
	112	25	5.5	810	2.9						
	93.3	30	6.4	861	2.3						
	70	40	8.0	948	1.8						
	56	50	9.4	1021	1.4						
	46.7	60	10	1085	1.1						
	35	80	13	1194	0.9						
	0.09	280	10	2.6	597				5.0	NMRV030	56B5/B14
186.7		15	3.7	683	3.5						
140		20	4.7	752	2.5						
112		25	5.5	810	2.9						
93.3		30	6.4	861	2.3						
70		40	8.0	948	1.8						
56		50	9.4	1021	1.4						
46.7		60	10	1085	1.1						
35		80	13	1194	0.9						



减速机选型表 / GEAR UNIT SELECTION TABLES

P_{in} (kw)	n_2 (r/min)	i	M_{20} (Nm)	F_{r2} (N)	f_s		
0.09	186.7	7.5	3.9	683	4.7	NMRV030 56B5/B14	5624
	140	10	5.0	752	3.6		
	93.3	15	7.0	861	2.6		
	70	20	8.8	948	2.0		
	56	25	10	1021	2.1		
	46.7	30	12	1085	1.7		
	35	40	14	1194	1.2		
	28	50	17	1286	1.0		
	23.3	60	18	1367	0.9		
	28	50	19	2475	2.1		
	23.3	60	21	2630	1.7		
	17.5	80	25	2895	1.3		
	14	100	29	3118	1.0		
	373.3	7.5	2.7	399	3.0		
0.12	280	10	3.5	439	2.6	NMRV025 56B14	5622
	186.7	15	5.1	503	1.8		
	140	20	6.5	553	1.4		
	93.3	30	9.0	633	1.0		
	70	40	11	697	0.8		
	186.7	7.5	5.2	683	3.5		
	140	10	6.6	752	2.7		
	93.3	15	9.3	861	1.9		
	70	20	12	948	1.5		
	56	25	14	1021	1.6		
	46.7	30	16	1085	1.3		
	35	40	19	1194	0.9		
	28	50	22	1286	0.8		
	46.7	30	17	2087	2.7		
0.18	35	40	21	2298	1.9	NMRV040 63B5/B14	6314
	28	50	25	2475	1.6		
	23.3	60	28	2630	1.3		
	17.5	80	33	2895	1.0		
	14	100	38	3118	0.8		
	23.3	60	29	3610	2.3		
	17.5	80	35	3973	1.9		
	14	100	39	4280	1.4		
	373.3	7.5	4.0	542	3.2		
	280	10	5.2	597	2.5		
	186.7	15	7.4	683	1.8		
	140	20	9.5	752	1.3		
	112	25	11	810	1.4		
	93.3	30	13	861	1.2		
70	40	16	948	0.9			
0.18	186.7	7.5	7.7	683	2.3	NMRV030 63B5/B14	6324
	140	10	10	752	1.8		
	93.3	15	14	861	1.3		
	70	20	18	948	1.0		
	56	25	20	1021	1.0		
	46.7	30	24	1085	0.8		



减速机选型表 / GEAR UNIT SELECTION TABLES

P_{in} (kw)	n_2 (r/min)	i	M_{20} (Nm)	F_{r2} (N)	f_s		
0.18	93.3	30	14	1657	2.5	NMRV040 63B5/B14	6312
	70	40	17	1824	1.8		
	56	50	21	1964	1.4		
	70	20	19	1824	2.1		
	56	25	23	1964	1.7		
	46.7	30	25	2087	1.8		
	35	40	32	2298	1.3		
	28	50	37	2475	1.0		
	23.3	60	42	2630	0.9		
	45	20	28	2113	1.6		
	36	25	34	2276	1.3		
	30	30	38	2419	1.3		
	22.5	40	47	2662	1.0		
	46.7	60	24	2865	2.1		
0.18	35	80	30	3153	1.5	NMRV050 63B5	6312
	28	100	34	3397	1.2		
	35	40	33	3153	2.3		
	28	50	39	3397	1.9		
	23.3	60	43	3610	1.6		
	17.5	80	52	3973	1.2		
	14	100	59	4280	0.9		
	18	50	56	3936	1.4		
	15	60	63	4183	1.1		
	11.3	80	75	4604	0.9		
	15	60	66	5467	2.1		
	11.3	80	79	6018	1.6		
	9	100	90	6270	1.4		
	373.3	7.5	5.6	542	2.3		
0.25	280	10	7.2	597	1.8	NMRV030 63B5/B14	6322
	186.7	15	10	683	1.3		
	140	20	13	752	0.9		
	112	25	15	810	1.0		
	93.3	30	18	861	0.8		
	186.7	7.5	11	1315	3.6		
	140	10	14	1447	2.8		
	93.3	15	20	1657	2.0		
	70	20	26	1824	1.5		
	56	25	32	1964	1.2		
	46.7	30	35	2087	1.3		
	35	40	44	2298	0.9		
	120	7.5	17	1524	2.6		
	90	10	22	1677	2.0		
0.25	60	15	31	1920	1.4	NMRV040 71B5/B14	7126
	45	20	39	2113	1.1		
	36	25	48	2276	0.9		
	30	30	53	2419	0.9		



减速机选型表 / GEAR UNIT SELECTION TABLES

P_{in} (kw)	n_1 (r/min)	i	M_{2m} (Nm)	F_{2T} (N)	f_s			
0.25	35	80	42	3153	1.1	NMRV050	63B5/B14 6322	
	28	100	48	3397	0.8			
	70	20	27	2503	2.7		NMRV050	71B5/B14 7114
	56	25	32	2696	2.2			
	46.7	30	36	2865	2.3			
	35	40	46	3153	1.7			
	28	50	54	3397	1.4			
	23.3	60	60	3610	1.1			
	17.5	80	72	3973	0.9			
	45	20	40	2900	1.9	NMRV050		71B5/B14 7126
	36	25	48	3124	1.5			
	30	30	54	3320	1.7			
	22.5	40	67	3654	1.2			
	18	50	78	3936	1.0			
	15	60	88	4183	0.8			
	28	50	55	4440	2.4	NMRV063	71B5/B14 7114	
	23.3	60	63	4719	2.0			
	17.5	80	76	5193	1.6			
	14	100	87	5595	1.4			
	18	50	81	5145	1.8			
	15	60	92	5467	1.5			
	11.3	80	110	6018	1.2	NMRV063	71B5/B14 7126	
	9	100	125	6270	1.0			
	17.5	80	80	6130	2.4			
	14	100	94	6603	1.9			
	11.3	80	117	7103	1.7			
	9	100	133	7380	1.4			
	0.37	373.3	7.5	8.3	1044	3.4	NMRV040	71B5/B14 7112
280		10	11	1149	2.6			
186.7		15	16	1315	1.9			
140		20	20	1447	1.4			
112		25	25	1559	1.1			
186.7		7.5	16	1315	2.5	NMRV040		71B5/B14 7124
140		10	21	1447	1.9			
93.3		15	30	1657	1.3			
70		20	39	1824	1.0			
56		25	47	1964	0.8			
46.7		30	52	2087	0.9			
112		25	25	2140	2.0			
93.3		30	29	2274	2.2			
70		40	37	2503	1.6			
56		50	44	2696	1.2			
46.7		60	50	2865	1.0	NMRV050	71B5/B14 7112	
35		80	62	3153	0.7			
140		10	21	1987	3.4			
93.3		15	31	2274	2.4			
70		20	39	2503	1.9			
70		20	39	2503	1.9		NMRV050	71B5/B14 7124



减速机选型表 / GEAR UNIT SELECTION TABLES

P_{in} (kw)	n_1 (r/min)	i	M_{2m} (Nm)	F_{2T} (N)	f_s			
0.37	56	25	47	2696	1.5	NMRV050	71B5/B14 7124	
	46.7	30	54	2865	1.6			
	35	40	68	3153	1.1			
	28	50	80	3397	0.9			
	23.3	60	89	3610	0.8			
	120	7.5	25	2091	3.4		NMRV050	80B5/B14 8016
	90	10	33	2302	2.6			
	60	15	47	2635	1.8			
	45	20	59	2900	1.3			
	36	25	72	3124	1.0			
	30	30	80	3320	1.1			
	35	40	70	4122	2.1			
	28	50	82	4440	1.6			
	23.3	60	94	4719	1.4			
	17.5	80	113	5193	1.1			
	14	100	129	5595	0.9	NMRV063	71B5/B14 7124	
	45	20	60	3791	2.4			
	36	25	73	4084	1.9			
	30	30	82	4339	2.1			
	22.5	40	102	4776	1.6			
	18	50	120	5145	1.2			
	15	60	137	5467	1.0	NMRV063	80B5/B14 8016	
	23.3	60	97	5569	2.1			
	17.5	80	119	6130	1.6			
	14	100	139	6603	1.3			
	18	50	124	6073	1.8			
	15	60	141	6453	1.5			
	11.3	80	173	7103	1.2	NMRV075	71B5 7124	
	9	100	196	7380	1.0			
	11.3	80	185	7859	1.7			
	9	100	212	8180	1.3			
	373.3	7.5	12	1044	2.3		NMRV075	80B5/B14 8016
	280	10	16	1149	1.8			
	186.7	15	24	1315	1.3			
	140	20	30	1447	1.0			
	112	25	37	1559	0.8			
140	20	31	1987	1.7	NMRV040	71B5/B14 7122		
112	25	38	2140	1.4				
93.3	30	43	2274	1.5				
70	40	55	2503	1.1				
56	50	65	2696	0.8				
46.7	60	74	2865	0.7		NMRV050	71B5/B14 7122	
186.7	7.5	24	1805	2.9				
140	10	32	1987	2.3				
93.3	15	46	2274	1.6				
70	20	59	2503	1.2				
56	25	70	2696	1.0	NMRV050		80B5/B14 8014	
46.7	30	80	2865	1.1				



减速机选型表 / GEAR UNIT SELECTION TABLES

P_{10} (kw)	n_1 (r/min)	i	M_{20} (Nm)	F_{10} (N)	f_s						
0.55	120	7.5	37	2091	2.3	NMRV050	80B5/B14	8026			
	90	10	48	2302	1.7						
	60	15	69	2635	1.2						
	45	20	88	2900	0.9						
	70	40	56	3272	1.9						
	56	50	68	3524	1.5	NMRV063	71B5/B14	7122			
	46.7	60	78	3745	1.2						
	35	80	96	4122	0.9						
	28	100	111	4440	0.7						
	70	20	60	3272	2.2						
	56	25	72	3524	1.8	NMRV063	80B5/B14	8014			
	46.7	30	82	3745	1.9						
	35	40	104	4122	1.4						
	28	50	122	4440	1.1						
	23.3	60	140	4719	0.9						
	60	15	70	3444	2.2	NMRV063	80B5/B14	8026			
	45	20	90	3791	1.6						
	36	25	108	4084	1.3						
	30	30	123	4339	1.4						
	22.5	40	152	4776	1.1						
	35	80	99	4865	1.3	NMRV075	71B5	7122			
	28	100	116	5241	1.0						
	35	40	108	4865	2.0						
	28	50	128	5241	1.6						
	23.3	60	144	5569	1.4						
	17.5	80	177	6130	1.1	NMRV075	80B5/B14	8014			
	14	100	206	6603	0.9						
	30	30	124	5122	2.1						
	22.5	40	156	5637	1.5						
	18	50	184	6073	1.2						
	15	60	210	6453	1.0	NMRV075	80B5/B14	8026			
	17.5	80	189	6783	1.5						
	14	100	221	7306	1.2						
	18	50	196	6719	2.0						
	15	60	224	7140	1.6						
	11.3	80	275	7859	1.1	NMRV090	80B5/B14	8026			
	9	100	315	8180	0.9						
	17.5	80	201	8571	2.6						
	14	100	236	9232	2.0				NMRV110	80B5	8014
	11.3	80	294	9931	1.9						
9	100	344	10320	1.5	NMRV110	80B5	8026				



减速机选型表 / GEAR UNIT SELECTION TABLES

P_{10} (kw)	n_1 (r/min)	i	M_{20} (Nm)	F_{10} (N)	f_s			
0.75	373.3	7.5	17	1433	3.0	NMRV050	80B5/B14	8012
	280	10	22	1577	2.4			
	186.7	15	31	1805	1.7			
	140	20	41	1987	1.3			
	112	25	49	2140	1.0			
	93.3	30	56	2274	1.1	NMRV050	80B5/B14	8024
	280	5	23	1577	2.7			
	186.7	7.5	33	1805	2.1			
	140	10	43	1987	1.7			
	93.3	15	62	2274	1.2			
	70	20	80	2503	0.9	NMRV063	80B5/B14	8012
	140	20	43	2597	2.3			
	112	25	52	2797	1.8			
	93.3	30	60	2973	2.0			
	70	40	77	3272	1.4			
	56	50	92	3524	1.1	NMRV063	80B5/B14	8024
	46.7	60	106	3745	0.9			
	93.3	15	63	2973	2.2			
	70	20	82	3272	1.6			
	56	25	98	3524	1.3			
	46.7	30	112	3745	1.4	NMRV063	90B5/B14	90S6
	35	40	141	4122	2.0			
	120	7.5	51	2734	2.9			
	90	10	67	3009	2.3			
	60	15	96	3444	1.6			
	45	20	123	3791	1.2	NMRV075	80B5/B14	8012
	36	25	147	4084	0.9			
	30	30	167	4339	1.0			
	46.7	60	107	4421	1.3			
	35	80	135	4865	1.0			
	28	100	159	5241	0.8	NMRV075	80B5/B14	8024
	56	25	101	4160	2.0			
	46.7	30	117	4421	2.0			
	35	40	147	4865	1.5			
	28	50	174	5241	1.2			
	23.3	60	196	5569	1.0	NMRV075	90B5/B14	90S6
	60	15	97	4065	2.4			
	45	20	124	4474	1.9			
	36	25	149	4820	1.4			
	30	30	170	5122	1.5			
22.5	40	213	5637	1.1	NMRV090	80B5/B14	8012	
35	80	143	5383	1.6				
28	100	169	5799	1.2				
28	50	182	5799	1.9				
23.3	60	209	6163	1.5				
17.5	80	258	6783	1.1	NMRV090	80B5/B14	8024	
14	100	302	7306	0.9				

减速机选型表 / GEAR UNIT SELECTION TABLES

P_{10} (kw)	n_2 (r/min)	i	M_{20} (Nm)	F_{12} (N)	f_s		
0.75	30	30	179	5667	2.6	NMRV090	90B5/B14
	22.5	40	226	6238	1.8		
	18	50	267	6719	1.5		
	15	60	306	7140	1.1		
	17.5	80	274	8571	1.9	NMRV110	80B5
	14	100	322	9232	1.5		
	15	60	325	9023	2.1	NMRV110	90B5
	11.3	80	401	9931	1.4		
	9	100	470	10320	1.1		
	11.3	80	401	12989	2.1	NMRV130	90B5
9	100	470	13500	1.7			
1.1	373.3	7.5	25	1433	2.1	NMRV050	80B5/B14
	280	10	33	1577	1.7		
	186.7	15	48	1805	1.2		
	140	20	62	1987	0.9		
	186.7	15	46	2359	2.1	NMRV063	80B5/B14
	140	20	60	2597	1.6		
	112	25	72	2797	1.2		
	93.3	30	82	2973	1.4		
	70	40	104	3272	1.0	NMRV063	90B5/B14
	120	7.5	75	2734	2.0		
	90	10	98	3009	1.6		
	60	15	140	3444	1.1		
	45	20	180	3791	0.8	NMRV063	90B5/B14
	186.7	7.5	50	2359	2.6		
	140	10	65	2597	2.0		
	93.3	15	92	2973	1.5		
	70	20	120	3272	1.1	NMRV063	90B5/B14
	56	25	144	3524	0.9		
	46.7	30	164	3745	1.0		
	112	25	77	3302	2.0		
	93.3	30	89	3509	1.9	NMRV075	80B5/B14
	70	40	114	3862	1.4		
	56	50	137	4160	1.1		
	46.7	60	158	4421	0.9		
	90	10	98	3551	2.3	NMRV075	90B5/B14
	60	15	142	4065	1.7		
	45	20	182	4474	1.3		
	36	25	219	4820	1.0		
	30	30	249	5122	1.0	NMRV075	90B5/B14

减速机选型表 / GEAR UNIT SELECTION TABLES

P_{10} (kw)	n_2 (r/min)	i	M_{20} (Nm)	F_{12} (N)	f_s		
1.1	93.3	15	95	3509	2.1	NMRV075	90B5/B14
	70	20	122	3862	1.7		
	56	25	148	4160	1.3		
	46.7	30	171	4421	1.3		
	35	40	216	4865	1.0	NMRV090	80B5/B14
	35	80	210	5383	1.1		
	28	100	248	5799	0.8		
	36	25	228	5333	1.6		
	30	30	263	5667	1.8	NMRV090	90B5/B14
	22.5	40	331	6238	1.2		
	18	50	391	6719	1.0		
	15	60	448	7140	0.8		
	35	40	222	5383	1.6	NMRV090	90B5/B14
	28	50	266	5799	1.3		
	23.3	60	306	6163	1.0		
	22.5	40	345	7882	2.3		
	18	50	414	8491	1.8	NMRV110	90B5
	15	60	476	9023	1.4		
	11.3	80	588	9931	1.0		
	28	50	278	7328	2.4		
23.3	60	324	7787	1.9	NMRV110	90B5	
17.5	80	402	8571	1.3			
14	100	473	9232	1.0			
11.3	80	588	12989	1.5			
9	100	689	13500	1.1	NMRV130	90B5	
17.5	80	408	11210	2.1			
14	100	480	12076	1.5			
373.3	7.5	34	1433	1.5			NMRV050
280	10	45	1577	1.2			
186.7	15	65	1805	0.9			
140	20	88	2597	1.5			
93.3	15	126	2973	1.1	NMRV063	90B5/B14	
70	20	164	3272	0.8			
373.3	7.5	35	1873	2.7			
280	10	45	2061	2.2			
186.7	15	66	2359	1.6	NMRV063	90B5/B14	
140	20	86	2597	1.2			
112	25	105	2797	0.9			
93.3	30	120	2973	1.0			
120	7.5	103	3227	2.1	NMRV075	100B5/B14	
90	10	134	3551	1.7			
60	15	193	4065	1.2			
56	50	187	4160	1.3			
46.7	60	215	4421	1.1	NMRV075	90B5/B14	
140	10	89	3065	2.2			
93.3	15	129	3509	1.6			
70	20	166	3862	1.3			
56	25	202	4160	1.0	NMRV075	90B5/B14	



减速机选型表 / GEAR UNIT SELECTION TABLES

P_{in} (kw)	n_2 (r/min)	i	M_{2n} (Nm)	F_{r2} (N)	f_s					
1.5	46.7	30	233	4421	1.0	NMRV075	90B5/B14	90L4		
	280	10	45	2433	3.2	NMRV075	90B5/B14	90S2		
	186.7	15	66	2785	2.3					
	140	20	86	3065	1.9					
	112	25	105	3302	1.4					
	93.3	30	121	3509	1.4					
	70	40	156	3862	1.1	NMRV090	100B5/B14	100L6		
	90	10	137	3929	2.7					
	60	15	198	4498	2.1					
	45	20	258	4951	1.5					
	36	25	310	5333	1.2					
	30	30	358	5667	1.3	NMRV090	90B5/B14	90L4		
	70	20	170	4273	2.1					
	56	25	207	4603	1.6					
	46.7	30	239	4891	1.7					
	35	40	303	5383	1.2					
	28	50	363	5799	0.9	NMRV090	90B5/B14	90S2		
	23.3	60	417	6163	0.8					
	56	50	197	4603	1.3					
	46.7	60	227	4891	1.1					
	45	20	264	6256	2.7					
	36	25	322	6739	2.4	NMRV110	100B5	100L6		
	30	30	363	7161	2.3					
	22.5	40	471	7882	1.7					
	18	50	565	8491	1.3					
	15	60	649	9023	1.1					
	35	40	315	6803	2.2	NMRV110	90B5	90L4		
	28	50	379	7328	1.7					
	23.3	60	442	7787	1.4					
	17.5	80	548	8571	0.9					
	46.7	60	236	6181	2.0					
	35	80	299	6803	1.3	NMRV110	90B5	90S2		
	28	100	358	7328	1.0					
	22.5	40	471	10309	2.3					
	18	50	565	11105	1.9					
	15	60	659	11801	1.4					
	11.3	80	802	12989	1.1	NMRV130	100B5	100L6		
	17.5	80	557	11210	1.5					
	14	100	655	12076	1.1					
	373.3	7.5	51	1873	1.8				NMRV063	90B5/B14
280	10	66	2061	1.5						
186.7	15	97	2359	1.1						
186.7	7.5	99	2785	1.9						
140	10	131	3065	1.5						
93.3	15	189	3509	1.1	NMRV075	100B5/B14	100L1-4			
373.3	7.5	50	2210	2.6						
280	10	66	2433	2.2						
186.7	15	97	2785	1.5						
140	20	126	3065	1.3						



减速机选型表 / GEAR UNIT SELECTION TABLES

P_{in} (kw)	n_2 (r/min)	i	M_{2n} (Nm)	F_{r2} (N)	f_s			
2.2	112	25	154	3302	1.0	NMRV075	100B5/B14	90L2
	93.3	30	178	3509	1.0			
	186.7	7.5	100	3081	2.9			
	140	10	132	3391	2.3			
	93.3	15	191	3882	1.9			
	70	20	249	4273	1.4	NMRV090	100B5/B14	100L1-4
	56	25	304	4603	1.1			
	46.7	30	351	4891	1.2			
	120	7.5	154	3570	2.2			
	90	10	201	3929	1.8			
	60	15	291	4498	1.4	NMRV090	112B5/B14	112M6
	45	20	378	4951	1.0			
	140	20	129	3391	2.0			
	112	25	159	3653	1.6			
	93.3	30	185	3882	1.7			
	70	40	237	4273	1.2	NMRV090	90B5/B14	90L2
	56	50	289	4603	0.9			
	70	20	255	5399	2.5			
	56	25	311	5816	2.2			
	46.7	30	356	6181	2.0			
	35	40	462	6803	1.5	NMRV110	100B5	100L1-4
	28	50	555	7328	1.2			
	23.3	60	648	7787	1.0			
	90	10	203	4965	3.5			
	60	15	294	5684	2.6			
	45	20	388	6256	1.9	NMRV110	112B5	112M6
	36	25	473	6739	1.6			
	30	30	532	7161	1.6			
	112	25	161	4616	3.1			
	93.3	30	187	4905	3.0			
	70	40	243	5399	2.2	NMRV110	90B5	90L2
	56	50	296	5816	1.7			
	46.7	60	347	6181	1.4			
	35	40	468	8897	2.2			
	28	50	563	9584	1.7			
	23.3	60	657	10185	1.4	NMRV130	100B5	100L1-4
	17.5	80	816	11210	1.0			
	36	25	473	8814	2.2			
	30	30	539	9366	2.2			
	22.5	40	691	10309	1.6			
18	50	829	11105	1.3	NMRV130	112B5	112M6	
15	60	966	11801	1.0				
35	80	444	8897	1.3				
28	100	525	9584	1.0				
28	50	570	13103	2.5				
23.3	60	657	13924	1.9	NMRV150	100B5	100L1-4	
17.5	80	816	15325	1.4				
14	100	960	16508	1.0				

减速机选型表 / GEAR UNIT SELECTION TABLES

P_{1n} (kw)	n_2 (r/min)	i	M_{2n} (Nm)	F_{2z} (Nm)	f_s		
3.0	373.3	7.5	68	2210	1.9	NMRV075 100B5/B14	100L2
	280	10	90	2433	1.6		
	186.7	7.5	135	2785	1.4		
	140	10	178	3065	1.1		
	93.3	15	258	3509	0.8		
	373.3	7.5	70	2446	3.0		
	280	10	92	2692	2.6		
	186.7	7.5	137	3081	2.1		
	140	10	180	3391	1.7		
	93.3	15	261	3882	1.4		
	70	20	340	4273	1.0		
	56	25	414	4603	0.8		
	46.7	30	479	4891	0.9		
	93.3	15	264	4905	2.5		
	70	20	348	5399	1.9		
	56	25	425	5816	1.6		
	46.7	30	485	6181	1.5		
	35	40	630	6803	1.1		
	28	50	757	7328	0.9		
	120	7.5	210	4511	3.1		
	90	10	277	4965	2.6		
	60	15	401	5684	1.9		
	45	20	528	6256	1.4		
	56	25	430	7607	2.2		
	46.7	30	491	8084	2.1		
	35	40	638	8897	1.6		
	28	50	767	9584	1.3		
	23.3	60	896	10185	1.0		
	17.5	80	1113	11210	0.8		
	90	10	277	6494	3.5		
	60	15	406	7434	2.6		
	45	20	528	8182	2.0		
	36	25	645	8814	1.6		
	30	30	735	9366	1.6		
	22.5	40	942	10309	1.2		
	28	50	778	13103	1.8		
23.3	60	896	13924	1.4			
17.5	80	1113	15325	1.0			
14.0	100	1310	16508	0.8			
4.0	373.3	7.5	91	2210	1.4		
	280	10	120	2433	1.2		
	186.7	7.5	180	2785	1.0		
	140	10	237	3065	0.8		
	373.3	7.5	93	2446	2.3		
	280	10	123	2692	1.9		
	186.7	7.5	182	3081	1.6		
	140	10	240	3391	1.3		
	93.3	15	348	3882	1.0		
	70	20	453	4273	0.8		


减速机选型表 / GEAR UNIT SELECTION TABLES

P_{1n} (kw)	n_2 (r/min)	i	M_{2n} (Nm)	F_{2z} (N)	f_s		
4.0	140	10	240	4285	2.5		
	93.3	15	352	4905	1.9		
	70	20	464	5399	1.4		
	56	25	566	5816	1.2		
	46.7	30	647	6181	1.1		
	120	7.5	280	4511	2.3		
	90	10	369	4965	1.9		
	60	15	535	5684	1.4		
	56	25	573	7607	1.6		
	46.7	30	655	8084	1.6		
	35	40	851	8897	1.2		
	28	50	1023	9584	1.0		
	23.3	60	1195	10185	0.8		
	120	7.5	283	5901	3.1		
	90	10	369	6494	2.6		
	60	15	541	7434	2.0		
	45	20	705	8182	1.5		
	36	25	860	8814	1.2		
	28	50	1037	13103	1.4		
	23.3	60	1195	13924	1.1		
	17.5	80	1484	15325	0.8		
	5.5	186.7	7.5	250	3893	2.2	
		140	10	330	4285	1.8	
		93.3	15	484	4905	1.4	
70		20	638	5399	1.0		
140		10	334	5605	2.5		
93.3		15	490	6416	1.9		
70		20	638	7062	1.4		
56		25	788	7607	1.2		
46.7		30	900	8084	1.2		
35		40	1171	8897	0.9		
70		20	645	9654	2.0		
56		25	788	10400	1.5		
46.7		30	934	11051	1.3		
35.0		40	1171	12163	1.3		
28.0		50	1426	13103	1.0		
23.3		60	1643	13924	0.8		
186.7		7.5	341	3893	1.6		
7.5		140	10	450	4285	1.3	
	93.3	15	660	4905	1.0		
	186.7	7.5	345	5092	2.2		
	140	10	455	5605	1.8		
	93.3	15	668	6416	1.4		
	70	20	870	7062	1.0		
	56	25	1074	7607	0.9		
	46.7	30	1228	8084	0.8		
	35	40	1596	8897	0.7		
	70	20	880	9654	1.5		
	56	25	1074	10400	1.1		

P_{in} (kw)	n_2 (r/min)	i	M_{in} (Nm)	F_{in} (N)	f_s			
7.5	46.7	30	1274	11051	0.9	NMRV150	132B5	132M4
	35	40	1596	12163	1.0			
11	186.7	7.5	512	6962	2.3	NMRV150	160B5	160M4
	140	10	675	7663	1.8			
	93.3	15	990	8771	1.3			
	70.0	20	1291	9654	1.0			
	56.0	25	1576	10400	0.8			
15	186.7	7.5	698	6962	1.7	NMRV150	160B5	160L4
	140	10	921	7663	1.3			
	93.3	15	1351	8771	0.9			
	70.0	20	1760	9654	0.7			

减速机安装方位 / GEAR BOX INSTALLATION POSITION

NMRV与电机安装方位 / NMRV AND MOTOR MOUNTING POSITION

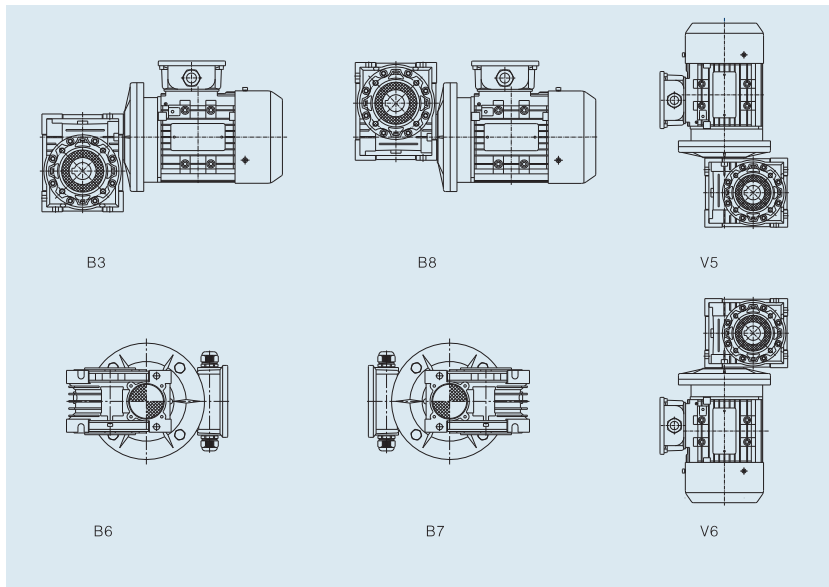


注: 如在订货时无特别说明, 将按B3安装方式供货。
Note: if there is no special instructions to B3 standards for installation.

NMRV配件系列 / NMRV ACCESSORIES SERIES





输出轴尺寸 / OUTPUT SHAFT SIZE



单向输出轴 (DZ)



双向输出轴 (SZ)



NMRV	G1	K1	L	L1	b2	t2	d(h6)	m	V1	V2
030	63	64	102	128	5	16	14	M6	30	32.5
040	78	82	128	164	6	20.5	18	M6	40	43
050	92	99.5	153	199	8	28	25	M10	50	53.5
063	112	109.5	173	219	8	28	25	M10	50	53.5
075	120	123.5	192	247	8	31	28	M10	60	63.5
090	140	154.5	234	309	10	38	35	M12	80	84.5
110	155	162	249	324	12	45	42	M16	80	84.5
130	170	170	265	340	14	48.5	45	M16	80	85
150	200	187	297	374	14	53.5	50	M16	82	87


NMRV配件系列 / NMRV ACCESSORIES SERIES

输出法兰 (F) 尺寸 / OUTPUT FLANGE DIMENSIONS (F)



NMRV配件系列 / NMRV ACCESSORIES SERIES

输出法兰 (F) 尺寸 / OUTPUT FLANGE DIMENSIONS (F)

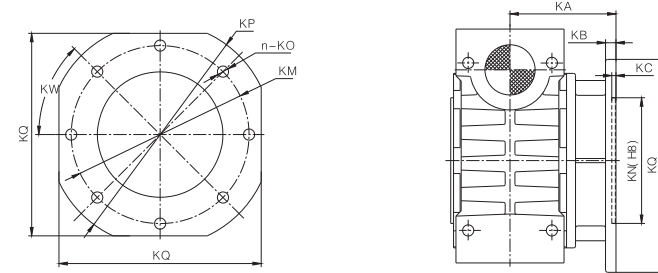


NMRV	030	040	050	063	075	090	110	130	150	
FA	KA	54.5	67	90	82	111	111	139	152	155
	KB	6	7	9	10	13	13	15	15	15
	KC	4	4	5	5	6	6	6	6	6
	KN	50	60	70	115	130	152	170	180	180
	KM	68	75	85	150	165	175	230	255	255
	KO	6.5(n=4)	9(n=4)	11(n=4)	11(n=4)	14(n=4)	14(n=4)	14(n=8)	16(n=8)	16(n=8)
	KP	80	110	125	180	200	210	280	320	320
	KQ	70	95	110	142	170	200	260	290	290
FB	KW	45°	45°	45°	45°	45°	45°	45°	45°	22.5°
	KA	-	97	120	112	-	122	-	-	-
	KB	-	7	9	10	-	18	-	-	-
	KC	-	4	5	6	-	6	-	-	-
	KN	-	60	70	115	-	180	-	-	-
	KM	-	75	85	150	-	215	-	-	-
	KO	-	9(n=4)	11(n=4)	11(n=4)	-	14(n=4)	-	-	-
	KP	-	110	125	180	-	250	-	-	-
FC	KQ	-	95	110	142	-	-	-	-	-
	KW	-	45°	45°	45°	-	45°	-	-	-
	KA	-	80	89	98	-	110	-	-	-
	KB	-	9	10	10	-	17	-	-	-
	KC	-	5	5	5	-	6	-	-	-
	KN	-	95	110	130	-	130	-	-	-
	KM	-	115	130	165	-	165	-	-	-
	KO	-	9.5(n=4)	9.5(n=4)	11(n=4)	-	11(n=4)	-	-	-
FD	KP	-	140	160	200	-	200	-	-	-
	KW	-	45°	45°	45°	-	45°	-	-	-
	KA	-	58	72	107	-	151	-	-	-
	KB	-	12	14.5	10	-	13	-	-	-
	KC	-	5	5	5	-	6	-	-	-
	KN	-	80	95	130	-	152	-	-	-
	KM	-	100	115	165	-	175	-	-	-
	KO	-	9(n=4)	11(n=4)	11(n=4)	-	14(n=4)	-	-	-
FE	KP	-	120	140	200	-	210	-	-	-
	KW	-	45°	45°	45°	-	45°	-	-	-
	KA	-	-	-	80.5	-	-	-	-	-
	KB	-	-	-	16.5	-	-	-	-	-
	KC	-	-	-	5	-	-	-	-	-
	KN	-	-	-	110	-	-	-	-	-
	KM	-	-	-	130	-	-	-	-	-
	KO	-	-	-	11(n=4)	-	-	-	-	-
KP	-	-	-	160	-	-	-	-	-	
KW	-	-	-	45°	-	-	-	-	-	

系列

NMRV配件系列 / NMRV ACCESSORIES SERIES

扭力臂 (A) 尺寸 / TORQUE ARM (A) SIZE

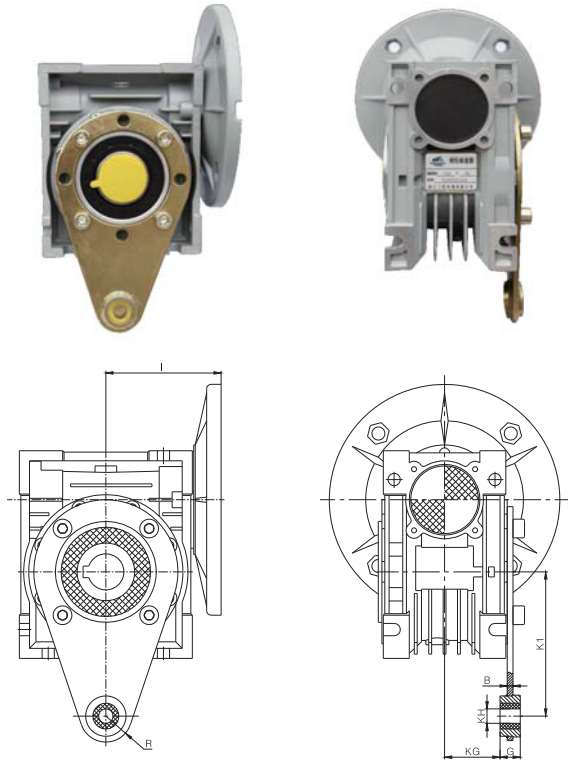


NMRV	B	I	K1	G	KG	KH	R
025	4	45	70	14	17.5	8	15
030	4	55	85	14	24	8	15
040	4	70	100	14	31.5	10	18
050	4	80	100	14	38.5	10	18
063	6	95	150	14	49	10	18
075	6	112.5	200	25	47.5	20	30
090	6	129.5	200	25	57.5	20	30
110	6	160	250	30	62	25	35
130	6	179	250	30	69	25	35
150	8	210	250	30	84	25	35

系列

NMRV配件系列 / NMRV ACCESSORIES SERIES


防尘盖尺寸 / DUST COVER SIZE

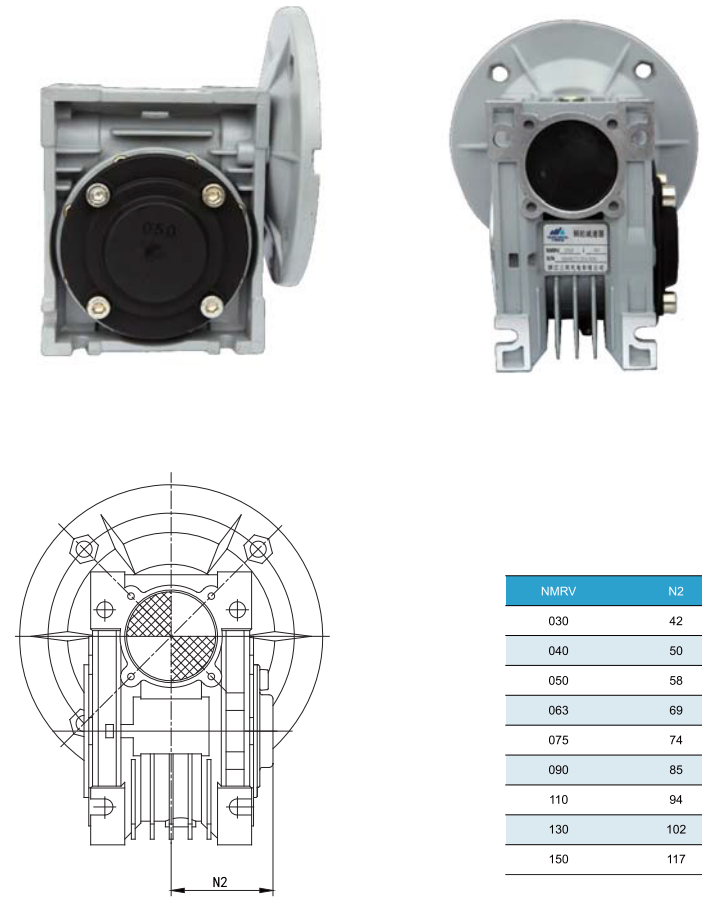


NMRV	N2
030	42
040	50
050	58
063	69
075	74
090	85
110	94
130	102
150	117

配件安装方位 / ACCESSORIES INSTALLATION POSITION


输出轴位置 / THE OUTPUT SHAFT POSITION



DZ1




DZ2




SZ

注：如没有特别说明，将按照如图DZ1和B3安装方面的组合样式供货。
 Note: If there is no special instructions, will be as shown in figure DZ1 and B3 mounted with respect to the combination of styles available.

输出法兰位置 / OUTPUT FLANGE POSITION






FA1、FB1、FC1、FD1、FE1



FA2、FB2、FC2、FD2、FE2


注：如没有特别说明，将按照如图F...1和B3安装方面的组合样式供货。
 Note: If there is no special instructions, will be in accordance with the figure F... 1 and B3 mounted with respect to the combination of styles available.

电机接线盒位置 / MOTOR TERMINAL BOX POSITION




注：如对电机接线盒位置有特别要求，订购时须参考上图的要求指定接线盒方位，否则接线盒方位将按安装方位图表中的方位提供。
 Note: If the motor terminal box position have special requirements, when ordering reference is made to the above requirements specified terminal box position, or junction box range according to installation position chart position is provided.

扭力臂(A)位置 / TORQUE ARM (A) POSITION




A1



A2

注：如没有特别说明，将按照如图A1和B3安装方面的组合样式供货。
 Note: If there is no special instructions, will be as shown in figure A1 and B3 mounted with respect to the combination of styles available.

尾出轴(E) / TAIL SHAFT (E) POSITION



E